


Range: NEO SENSOR

Ref: 57070 - Deck-mounted sensor and timed-flow single tap, external, mains-operated, 1.7l/min

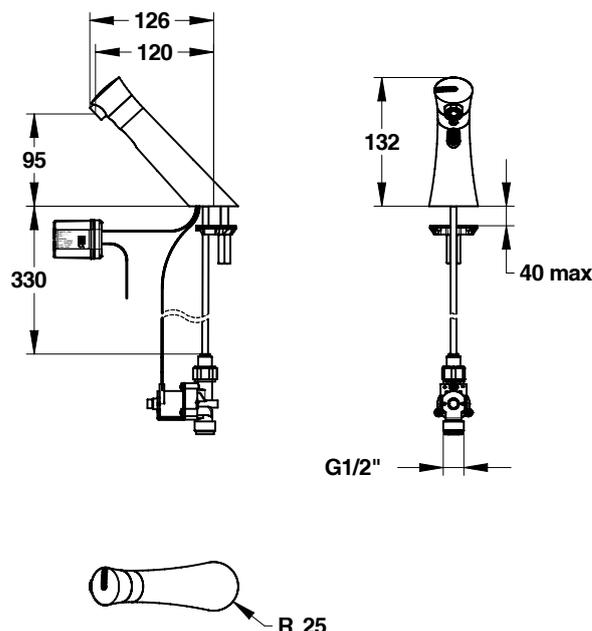

> Working pressure :

- 2 to 5 bar

> Function:

- Sensor trigger suitable for elderly, children and disabled people

> Flow time:

- 7 sec adjustable with PRESTOCOM : <http://www.presto.fr/whatabout/prestocom/>

> Flow :

- 1.7l/min with integrated flow controller sprayer.
- High quality anti-limescale aerator
- Anti-water-hammering design

> Hydraulic supply:

- G 1/2" (15x21) - Cold or premixed water

> Power supply :

- 230 V AC / 7 V DC Transformer in IP65 waterproof case

> Material and colour finish:

- Chromed injected molded metal body

> Thermal resistance :

- Resistant to a temperature of 75°C for 30-minute-thermal-shocks

> Security:

- Anti-overflow security time set to 30 seconds preventing the water to flow continuously
- Duty flush 30 sec every 24h after last use (adjustable flow time and frequency)
- Low battery alert (blinking led)

> Delivered with:

- 1 Brass clamping nut
- 1 Gasket and 1 Washer
- 1 External solenoid valve
- 1 Filter seal
- 230 VAC/7 VDC Transformer in IP65 waterproof case

> Standards & approvals:

- Brass in accordance with EN 1982, EN 12164, EN 12156
- 200-hour neutral salt spray resistant (NSS) in accordance with ISO 9227

