


Range: Deck-mounted mixer tap

Ref: 28682 - PRESTO 4000 S single control mixer tap

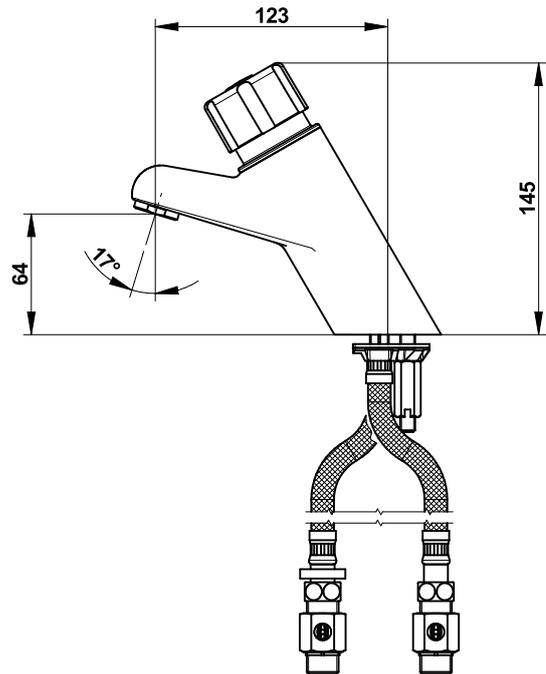

> Working pressure :

- 1 to 5 bar

> Flow :

- 1,9 l/min (0,5 gpm) Spray with integrated flow limiter
- Anti-water-hammering design
- Vandalism proof and anti-clogging spout

> Flow time :

- 15 seconds (± 5 sec.)

> Hydraulic supply :

- G 3/8" (12x17) on hose
- G 1/2" (15x21) on stop valve

> Material and colour finish :

- Chrome-plated pushbutton

> Thermal resistance :

- Resistant to a temperature of 75°C for 30-minute-thermal-shocks

> Security :

- Adjustable tamper-proof temperature limiter to prevent scalding
- Patented anti-blocking "S" system to avoid the water to flow continuously

> Delivered with :

- 2 Filter gaskets
- 2 Wras Stop valves M G3/8 - F G1/2
- 2 PEX hoses with NF check valves and nuts F G3/8
- Fixing bracket
- 1 Flange gasket
- 1 Brass clamping nut
- Instruction manual

> Standards & approvals :

- Acoustic class I
- 200-hour neutral salt spray resistant (NSS) in accordance with ISO 9227
- Brass body in accordance with EN 1982, EN 12164, EN 12156
- WRAS approved

Ce document n'est pas contractuel ; nous nous réservons le droit de modifier les caractéristiques de nos produits sans préavis. Toutes nos marques et tous modèles sont déposés.

