


**Range:** Single deck-mounted tap  
**Ref:** 20001 - PRESTOMAT 2000S, anti-blocking

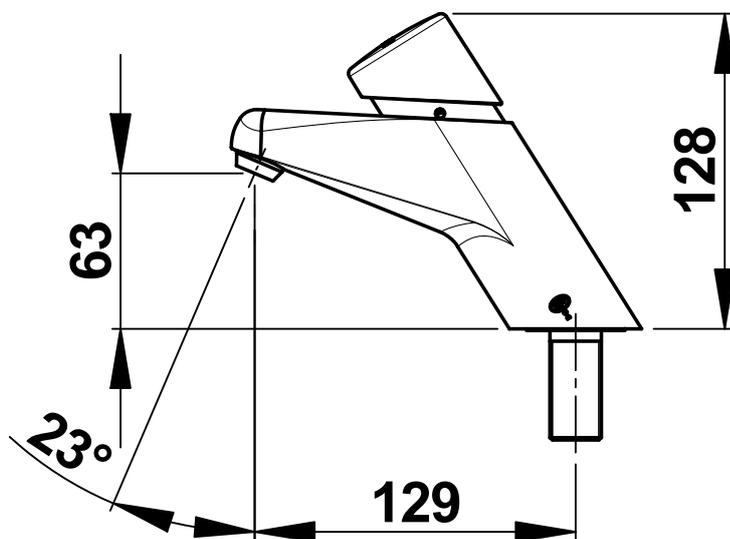

#### > Working pressure :

- 1 to 5 bar

#### > Flow :

- 4l/min Flow limiter / 5-positions flow adjustment device inaccessible to users
- Anti-water-hammering design
- Vandalism proof and anti-clogging spout

#### > Flow time :

- 15 seconds ( ± 5 sec.) - 4-positions flow adjustment device

#### > Hydraulic supply :

- M G 1/2" (15x21) - Cold water (Blue skirt)

#### > Thermal resistance :

- Resistant to a temperature of 75°C for 30-minute-thermal-shocks

#### > Security :

- Patented anti-blocking "S" system to avoid the water to flow continuously

#### > Delivered with :

- 1 G 1/2" nut for 12x14 tube with filter gasket
- 1 Stainless steel plain washer
- 1 Brass clamping nut
- 1 Nitrile plain washer

#### > Standards & approvals :

- Acoustic class I
- Brass body in accordance with EN 1982, EN 12164, EN 12165
- Chrome-plated surface treatment in accordance with EN 12540 / 200-hour neutral salt spray resistant (NSS) in accordance with ISO 9227
- WRAS : 2304309

