


**Range:** DL 400 SE®

**Ref:** 27403 - Mechanical timed-flow single tap for shower with straight stop valve

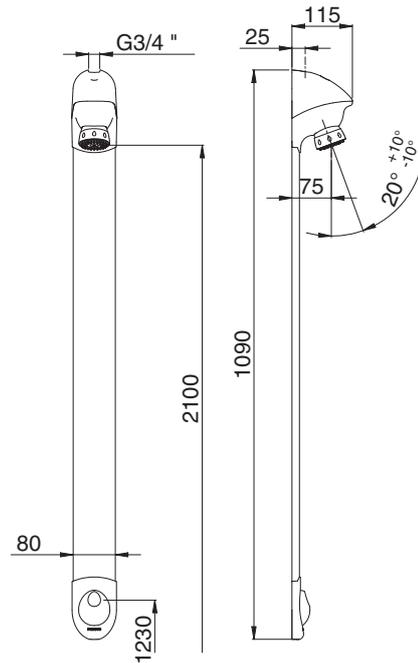

> **Working pressure :**

- 1 to 5 bar

> **Operation:**

- Soft trigger suitable for PRM, children and the elderly

> **Flow :**

- 10l/min at 3 bar with integrated flow regulator in the shower head
- Anti-water-hammering design
- Fixed shower head with orientable shower jet and anti-limescale spikes

> **Flow time :**

- 30 seconds (± 5 sec.)

> **Hydraulic supply :**

- G 1/2" (15x21) top water inlet with straight stop valve
- For cold or premixed water

> **Material and colour finish :**

- Injected molded metal body and cover
- Extruded profile in aluminium (magnesium-silicon alloy 6060)

> **Thermal resistance :**

- Resistant to a temperature of 75°C for 30-minute-thermal-shocks

> **Security :**

- Patented anti-blocking "S" system to avoid the water to flow continuously

> **Delivered with :**

- VBA screws and nylon plugs
- M G 1/2" - FG3/4" stop valve and filter adapted for olive screw connection and ø15 mm tubes
- Instruction manual

> **Standards & approvals :**

- Acoustic class I
- Molded chrome-plated body in accordance with EN 12540
- 200-hour neutral salt spray resistant (NSS) in accordance with ISO 9227
- WRAS approved

